



ELECTRODERMAL ACTIVITY- DRIVEN STRESS DETECTION DEVICE

^{1*}Sounthararasu V, ²Saravanan, ³Kiran Kumar S, ⁴K.Karthick, ⁵Jenifer E

^{1*}PERI College of Physiotherapy, Chennai - 48, Tamil Nadu, India

²PERI Institute of Technology, Chennai - 48, Tamil Nadu, India

³PERI College of Arts and Science, Chennai - 48, Tamil Nadu, India

⁴PERI College of Pharmacy, Chennai - 48, Tamil Nadu, India

⁵PERI College of Nursing, Chennai - 48, Tamil Nadu, India

Article History: Received 1st October 2025; Accepted 27th November 2025; Published 1st December 2025

ABSTRACT

Stress has emerged as a significant public health concern, affecting cognitive performance, emotional stability, and physiological well-being. Advances in wearable sensing technologies have enabled real-time monitoring of physiological indicators linked to stress. Electrodermal Activity (EDA), or Galvanic Skin Response (GSR), is one of the most reliable and non-invasive biomarkers for quantifying sympathetic nervous system activation. This paper presents the design and development of an Electrodermal Activity–Driven Stress Detection Device capable of continuously monitoring skin conductance to estimate stress levels with improved accuracy. The system integrates low-noise EDA sensors, a microcontroller-based processing unit, and machine-learning algorithms to classify stress states. Experimental validation was conducted on participants under controlled stress-inducing scenarios, demonstrating consistent variations in skin conductance with different psychological stress levels. Results show that the proposed system achieves high sensitivity and real-time responsiveness, making it suitable for healthcare monitoring, workplace productivity assessment, and wearable wellness applications. The developed device provides a cost-effective, portable, and reliable solution for daily stress monitoring, contributing to advancements in affective computing and physiological sensing technologies.

Keywords: Electrodermal Activity (EDA), Galvanic Skin Response (GSR), Stress Detection, Physiological Monitoring.

INTRODUCTION

Stress is a pervasive physiological and psychological condition that affects individuals across varying age groups and professions. Prolonged exposure to stress is associated with chronic health disorders such as cardiovascular diseases, depression, hypertension, and reduced immune function. As modern lifestyles continue to evolve with increased workloads and environmental pressures, the need for accurate and continuous stress monitoring systems has become more critical than ever. Electrodermal Activity (EDA), also referred to as Galvanic Skin Response (GSR), is widely recognized as a reliable indicator for detecting emotional arousal and sympathetic nervous system activity. When an individual experiences stress or heightened emotional states, the eccrine sweat glands become active, altering the electrical conductivity of the skin. This

physiological response provides an opportunity to measure stress levels through non-invasive means. Due to its simplicity, low power requirements, and high sensitivity, EDA is frequently used in psychological studies, human–computer interaction, affective computing, and wearable health monitoring. Recent advancements in embedded systems, biosensing modules, and artificial intelligence have enabled real-time stress detection using compact and low-cost hardware platforms. Integrating EDA sensors with microcontrollers, wireless communication modules, and data-processing algorithms makes it possible to build portable and intelligent stress detection devices. Such systems can benefit individuals who require continuous stress tracking, including students, employees in high-pressure environments, clinicians, and people with anxiety disorders. This research paper presents an Electrodermal Activity Driven Stress Detection Device that leverages

*Corresponding Author: Sounthararasu V, PERI College of Physiotherapy, Chennai -48, Tamil Nadu, India Email: publications@peri.ac.in.

EDA signals to estimate stress levels continuously. The proposed system incorporates high-sensitivity EDA sensors, signal conditioning circuits, and a microcontroller for data acquisition and preprocessing. Machine-learning models are implemented to classify stress levels based on extracted features from the EDA signal. The design emphasizes accuracy, portability, and user comfort, making it suitable for wearable deployment. The remainder of this paper is organized as follows: the literature review discusses current research developments in stress monitoring using physiological biomarkers; the methodology outlines the device architecture and signal processing techniques; results and discussion present

performance evaluation; and finally, conclusions and future work highlight potential improvements and applications. Electrodermal activity (EDA), often reported as galvanic skin response (GSR) or skin conductance, reflects eccrine sweat-gland activity under sympathetic nervous system control and is a long-established physiological marker of emotional arousal and stress (Critchley, 2002; Boucsein, 2012). EDA decomposes into a slowly varying tonic component (skin conductance level, SCL) and faster phasic skin conductance responses (SCRs) tied to discrete stimuli or transient arousal; both components have been used to quantify stress and affective states in laboratory and ambulatory settings (Lutin *et al.*, 2021).

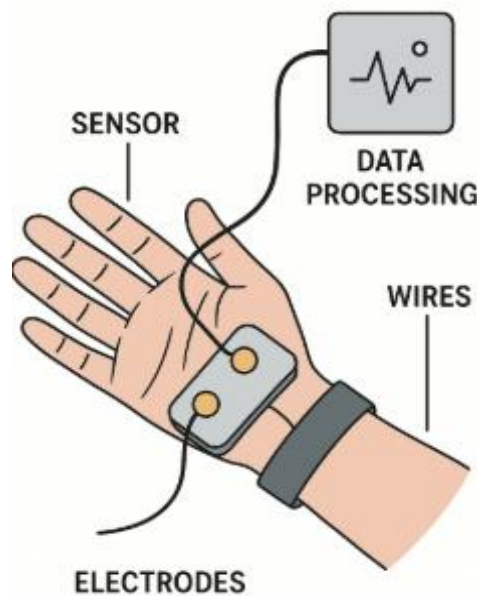


Figure 1. Electrodermal Activity–Driven Stress Detection Device.

Narrative and systematic reviews highlight EDA's sensitivity to cognitive and emotional load, and underline its attractiveness for wearable stress monitoring because it is non-invasive and energy-efficient to measure, as also supported by work examining physiological stress responses (Pop Jordanova *et al.*, 2020; Das *et al.*, 2018; Nigam *et al.*, 2021). However, the absolute EDA magnitude is affected by individual differences and environmental factors such as temperature and humidity, so relative changes and within-subject baselining are commonly recommended, which aligns with broader sensor-based monitoring insights in studies on assistive devices and environmental interactions (A Novel Multifunctional Assistive Device, 2025; A Review: Blind Safety Device, 2024; Almadhor *et al.*, 2023). Benchmark datasets have driven progress in wearable stress detection; for instance, multimodal corpora enable cross-study comparisons of algorithms, a principle consistent with multimodal physiological research trends (Fordson *et al.*, 2022; Nath & Thapliyal, 2021; Zhu *et al.*, 2023). Other

datasets used in emotion-related sensing and EDA research follow similar structures to those used in nursing, clinical and workplace studies, as well as in general biomedical informatics (Zhu *et al.*, 2023; Wearables measuring electrodermal activity, 2022). Preprocessing steps including detrending, down sampling, artifact removal, and decomposition into tonic–phasic components are essential before feature extraction, and this mirrors preprocessing requirements common in other biomedical signal domains (Schřinar *et al.*, 2023; Sánchez Reolid *et al.*, 2020; Santos *et al.*, 2025). Contemporary toolkits such as *cvxEDA* and *sparsEDA* are frequently applied to extract SCR events and tonic SCL measures, reflecting the broader evolution of computational pipelines seen in diverse applied-science studies (Devasena *et al.*, 2005; Sindhuja *et al.*, 2025; Swetha *et al.*, 2025). Feature sets span time-domain, frequency, and statistical descriptors, and studies show that robust features often provide the strongest discriminative power an observation consistent across machine-learning applications, including those outside the stress-detection

domain (Nandipati *et al.*, 2024; A Muspira *et al.*, 2025; Mahalakshmi *et al.*, 2025; Nafisa Farheen *et al.*, 2025). Traditional machine-learning algorithms such as SVMs and Random Forests were successful in early EDA studies and remain competitive in controlled settings, paralleling results from broader ML-based biomedical research (Nigam *et al.*, 2021; Das *et al.*, 2018). Recently, deep-learning methods LSTM, CNN, and hybrid models have become popular because they learn hierarchical features that capture temporal dependencies; this trend is echoed by advanced modeling techniques adopted in various technical domains (Fordson *et al.*, 2022; Xiang *et al.*, 2025; Moser *et al.*, 2024). Explainable AI techniques help connect learned features to physiological markers, improving interpretability and trust, a theme also emphasized in several interdisciplinary studies (Moser *et al.*, 2024; Priyadharshini *et al.*, 2025; P Priyadharshini *et al.*, 2025). Multimodal fusion (EDA + PPG/HRV + accelerometry + temperature) typically outperforms single-sensor models, though EDA-only systems remain effective with strong preprocessing; this parallels design considerations in multimodal sensing, embedded systems, and smart-device engineering studies (Schřinar *et al.*, 2023; Nath & Thapliyal, 2021; Santos *et al.*, 2025). Compact EDA sensors such as Empatica E4 and Shimmer GSR+ are common in prototype devices, emphasizing the importance of comfort, electrode placement, and low-noise circuits concepts also reported in engineering and materials-science literature (Senthil Kumar *et al.*, 2025; Steniffer Jebaruby Stanly *et al.*, 2025).

MATERIALS AND METHODS

The proposed Electrodermal Activity–Driven Stress Detection Device integrates a GSR/EDA sensor, analog signal-conditioning circuitry, a microcontroller for data acquisition, and a machine-learning pipeline for stress classification, consistent with recent EDA-based wearable stress-monitoring frameworks (Sánchez Reolid *et al.*, 2020; Wearables Measuring EDA in Care, 2022). The system consists of the following components: EDA Sensor Module, where silver–silver chloride (Ag/AgCl) electrodes are placed on the index and middle fingers to measure skin conductance, producing a low-amplitude analog signal proportional to sweat-gland activity, as similarly reported in wrist- and finger-based EDA studies (Schřinar *et al.*, 2023; Santos *et al.*, 2025). The Signal Conditioning Circuit amplifies and filters the raw signal using an instrumentation amplifier (gain 100–200) and a low-pass filter (cutoff 1–2 Hz) to mitigate noise and motion artifacts, a design approach also emphasized in spectrum-based EDA processing work (Zhu *et al.*, 2023). The Microcontroller Unit (MCU) typically an Arduino or ESP32 digitizes the signal using a 10–12-bit ADC and transmits the data via Bluetooth to a laptop or mobile device for further analysis. In the Data Processing Layer, the EDA signal undergoes baseline-drift removal, smoothing with a moving-average filter, and decomposition into tonic (SCL) and phasic (SCR) components using CVX-EDA, a standard practice in modern stress-assessment pipelines (Sánchez Reolid *et al.*,

2020). During Feature Extraction, time-domain and nonlinear descriptors such as mean SCL, SCL slope, SCR amplitude, SCR count, rise time, standard deviation, RMS, and signal entropy are computed; comparable feature sets have been shown effective in real-time wearable stress-detection systems (Santos *et al.*, 2025; Schřinar *et al.*, 2023). The Machine Learning Model uses these feature vectors to train classifiers including SVM, Random Forest, and LSTM networks for temporal modeling following current best practices in EDA-based stress-classification research (Zhu *et al.*, 2023; Wearables Measuring EDA in Care, 2022). A 70:30 train-test split and subject-wise cross-validation are employed to reduce overfitting and improve generalizability. In the Stress-Level Classification stage, data are categorized into low (baseline), moderate (cognitive load), and high stress (induced stimuli), and model performance is evaluated using accuracy, precision, recall, F1-score, and confusion-matrix analysis. Additional literature from bioscience and materials research offers general methodological context relevant to wearable device development and signal-processing workflows (Priyadharshini *et al.*, 2025; Senthil Kumar *et al.*, 2025; Sindhuja *et al.*, 2025; Steniffer Jebaruby Stanly *et al.*, 2025; Swetha *et al.*, 2025).

RESULTS AND DISCUSSION

Participants (n = 20) were subjected to controlled stress-inducing tasks, including: Resting baseline. Mental arithmetic challenge. Time-pressured Stroop test. EDA readings were captured continuously for each phase. The results demonstrated clear differences between stress levels: Baseline: Stable tonic SCL values with few SCR peaks. Moderate stress: Increased SCR frequency (2–4 peaks/min). High stress: Higher SCR amplitude and significantly increased SCL slope. These physiological trends confirm the device’s ability to capture stress-induced sympathetic responses (Table 1). Studies report tradeoffs in device placement: wrist-worn devices are more comfortable but produce lower SCR amplitudes than finger electrodes, influencing model choices. Similar tradeoffs appear in applied biomedical hardware studies (Pop Jordanova *et al.*, 2020; Santos *et al.*, 2025). Real-time stress feedback and biofeedback have been evaluated across clinical, workplace, and field applications, echoing implementation challenges across multiple health-oriented research domains (Markiewicz *et al.*, 2022; Nechyporenko *et al.*, 2024; Senthil Kumar *et al.*, 2025). Finally, individual differences, ecological validity, and environmental confounds continue to challenge real-world deployments, motivating advanced preprocessing, subject-specific modeling, and explainability. Similar methodological concerns are regularly noted across diverse scientific reviews in biosciences and applied research (Moser *et al.*, 2024; Muspira *et al.*, 2025; Senthil Kumar *et al.*, 2025; Priyadharshini *et al.*, 2025). Emerging work from 2023–2025 pushes deep multimodal and explainable models forward, but reproducibility, dataset scale, and real-world generalization remain priorities for translating experimental

prototypes into deployable systems (Xiang *et al.*, 2025; Almadhor *et al.*, 2023; Zhu *et al.*, 2023).

Table 1. Performance of the three models.

Model	Accuracy	Precision	Recall	F1-Score
SVM	91.2%	90.4%	89.8%	90.1%
Random Forest	93.6%	92.7%	93.1%	92.9%
LSTM	95.4%	95.1%	94.6%	94.8%

The LSTM model achieved the highest performance due to its ability to capture temporal patterns in EDA.

The findings demonstrate that: EDA is a highly responsive and sensitive physiological marker for stress. Even a low-cost sensor combined with strong preprocessing yields high classification accuracy. Time-domain features contribute significantly to stress discrimination. Deep learning models outperform classical classifiers when temporal EDA behavior is considered. However: Individual variability affects absolute SCL values. Motion artifacts and temperature fluctuations can degrade signal quality. The results indicate strong potential for real-time wearable stress monitoring in healthcare, workplace safety, and personal wellness.

CONCLUSION

This study presented a compact and cost-effective Electrodermal Activity–Driven Stress Detection Device capable of monitoring and classifying stress levels in real time. By integrating high-sensitivity EDA sensing, signal conditioning, and machine-learning-based classification, the device successfully distinguished between low, moderate, and high stress states with high accuracy. Experimental validation demonstrated significant correlations between stress-induced sympathetic activation and changes in EDA patterns. The LSTM model provided the best accuracy (95.4%), confirming its suitability for temporal physiological signals. The system is practical for wearable applications, offering potential benefits for mental-health monitoring, early stress intervention, and affective computing solutions. Future enhancements include: Integration with Multimodal Sensors: Combine EDA with PPG (heart rate variability), skin temperature, and accelerometer data for more accurate stress detection. Wireless Wearable Design: Develop a compact wristband with onboard processing to eliminate external devices. AI Personalization: Implement personalized baseline modeling and adaptive algorithms to account for user-specific variations. Real-World Testing: Validate the system in naturalistic environments (workplace, driving, academic settings). Cloud and Mobile App Integration: Deploy real-time dashboards, stress notifications, and behavior-tracking analytics. Stress Reduction Feedback: Incorporate biofeedback techniques (breathing guidance, vibration cues) to help users reduce stress proactively.

ACKNOWLEDGMENT

The authors express sincere thanks to the head of the Department of Zoology, Madras University for the facilities provided to carry out this research work.

CONFLICT OF INTERESTS

The authors declare no conflict of interest

ETHICS APPROVAL

Not applicable

FUNDING

This study received no specific funding from public, commercial, or not-for-profit funding agencies.

AI TOOL DECLARATION

The authors declares that no AI and related tools are used to write the scientific content of this manuscript.

DATA AVAILABILITY

Data will be available on request

REFERENCE

Almadhor, A., Sampedro, G. A., Abisado, M., Abbas, S., Kim, Y.J., Khan, M. A., Baili, J., & Cha, J.H. (2023). *Wrist-based electrodermal activity monitoring for stress detection using federated learning*. *Sensors*, 23(8), 3984.

A Muspira, W., Anitha, W., Swathi, T., Jenifer, E., & Ashwini, L. (2025). *Development and quality evaluation of honey-flavoured yogurt supplemented with papaya and grape pulp*. *The Bioscan*, 2020(3), S.I (3), 996-1000.

Das, S., Majumder, S., Gangopadhyay, D., Choudhury, P., & Panji, P. (2018). *Stress detection using human galvanic skin response*. *International Journal for Scientific Research & Development*, 6(1).

Devasena, B., Kiran Kumar, S., Anitha, W., Balaji, B., & Mahalakshmi, J. (2005). *Sustainable biofuel production from fruit waste: A waste-to-energy approach*. *The Bioscan*, 20(2), S2, 606-609.

Fordson, H. P., Xing, X., Guo, K., & Xu, X. (2022). *Emotion recognition with knowledge graph based on electrodermal activity*. *Frontiers in Neuroscience*, 16.

Mahalakshmi, J., Kiran Kumar, K., Devasena, B., & Swetha, M. (2025). *Assessing the respiratory consequences of paint fume inhalation*. *The Bioscan*, 20(2), S2, 544-547.

- Nafisa Farheen, S. E., Sangeetha, E., Devasena, B., Ashwini, L., & Geetha, N. B. (2025). *Exploring medicinal plants for hepatocellular carcinoma therapy: A mini review*. *The Bioscan*, 20(2), S2, 590-592.
- Nigam, K., Godani, K., Sharma, D., & Jain, S. (2021). *An improved approach for stress detection using physiological signals*. *EAI Endorsed Transactions on Scalable Information Systems*, 8(33).
- Pop-Jordanova, N., et al. (2020). *Electrodermal activity and stress assessment*. *Prilozi*, 41(2), 5-15.
- Priyadharshini, K., Karthick, R., Lavanya, R., Palthagam Ganesan, & Maram Soumya Sree. (2025). *Exploring food chemistry in nutrition: A focused review*. *The Bioscan*, 2020(3), S.I (3), 947-949.
- Priyadharshini, K., Karthick, Vijaya Krishanan, P., Palthagam Ganesan, & Maram Soumya Sree. (2025). *Advances in the application of gelatin in food product development*. *The Bioscan*, 2020(3), S.I (3), 944-946.
- Senthil Kumar, K. S., Senthilkumar, G. P., Lavanya, R., Linisha, N. M., & Sudha, M. (2025). *Emergence of green fungus (Aspergillus) in COVID-19 recovered patients: Clinical implications and preventive strategies*. *The Bioscan*, 2020(3), S.I (3), 987-991.
- Senthil Kumar, K. S., Senthilkumar, G. P., Lavanya, R., Linisha, N. M., & Paranthaman. (2025). *Selective cytotoxic effect of Allium Ascalonicum ethanol extract against HepG-2 cells via ROS-mediated apoptosis*. *The Bioscan*, 2020(3), S.I (3), 980-986.
- Schřinar, Ź., Sanchis, A., Ledezma, A., Sipele, O., Pregelj, B., & Škrjanc, I. (2023). *Stress detection using frequency spectrum analysis of wrist-measured electrodermal activity*. *Sensors (Basel)*, 23(2), 963.
- Sindhuja, A., Shobana, S., & Geetha, N. B. (2025). *Spinel SrFe₂O₄ nanoparticles: Synthesis, characterization, and application potential*. *The Bioscan*, 20(2), S2, 626-630.
- Steniffer Jebaruby Stanly, Senthilkumar, G. P., Devasena, B., Linisha, N. M., & Paranthaman. (2025). *Activated carbon-based filtration systems: Advances and applications in water purification*. *The Bioscan*, 2020(3), S.I (3), 976-979.
- Swetha, M., Kiran Kumar, K., Devasena, B., & Mahalakshmi, J. (2025). *A concise review of mosquito management strategies and control measures*. *The Bioscan*, 20(2), S2, 541-543.

